


Specifications

Model NO .	YT4L-BS	
Nominal Voltage	12V	
Rated Capacity (10 hours rate)	4 Ah	
Dimensions	Length	113 mm
	Width	69 mm
	Height	85 mm
	Total Height	85 mm
Approx. Weight	1.36 kg ±3%	
Charge Current (A)	0.4 A (14.4V constant voltage charge)	



Discharge Characteristics

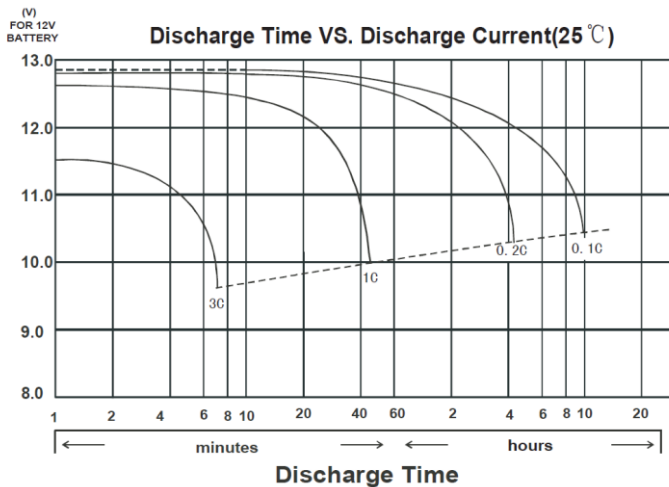

Electrical Specifications


Capacity 25°C(77°F)	10hours rate (0.4 A to 10.5V)	4Ah
	5 hours rate (0.8A to 10.2V)	3.4 Ah
	1C (4A to 9.6V)	1.8 Ah
	3C (12A to 9.6V)	1.5 Ah
Cold Cranking Amperes(-18°C)		45 A
Internal Resistance (at 1KHz)		Approx.23 mΩ
Operating Temperature Range	Charge	0°C (32°F) to 40°C (104°F)
	Discharge	-30°C (-22°F) to 50°C (122°F)
	Storage	-15°C (5°F) to 40°C (104°F)
Life Expectancy (Cycle Use)	60% depth of discharge 250 cycles	
	30% depth of discharge 400 cycles	
Charge Retention (self-discharge life) at 20°C (68°F)	1 month	92%
	3 month	90%
	6 month	80%
Warranty	1 year	
Case Material	ABS	

Specifications

Model NO .	YT5L-BS	
Nominal Voltage	12V	
Rated Capacity (10 hours rate)	5 Ah	
Dimensions	Length	113 mm
	Width	69 mm
	Height	105 mm
	Total Height	105 mm
Approx. Weight	1.75 kg ±3%	
Charge Current (A)	0.5 A (14.4V constant voltage charge)	



Discharge Characteristics

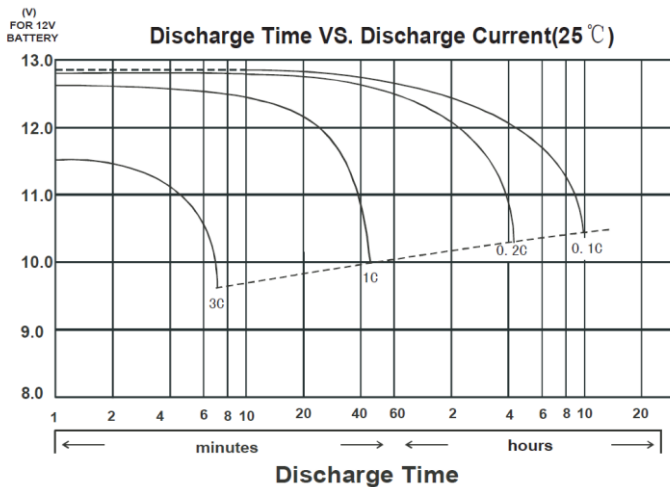

Electrical Specifications

Capacity 25°C(77°F)	10hours rate (0.5 A to 10.5V)	5Ah
	5 hours rate (1A to 10.2V)	4.25Ah
	1C (5A to 9.6V)	2.25 Ah
	3C (15A to 9.6V)	1.785 Ah
Cold Cranking Amperes(-18°C)		65 A
Internal Resistance (at 1KHz)		Approx.20 mΩ
Operating Temperature Range	Charge	0°C (32°F) to 40°C (104°F)
	Discharge	-30°C (-22°F) to 50°C (122°F)
	Storage	-15°C (5°F) to 40°C (104°F)
Life Expectancy (Cycle Use)	60% depth of discharge 250 cycles	
	30% depth of discharge 400 cycles	
Charge Retention (self-discharge life) at 20°C (68°F)	1 month	92%
	3 month	90%
	6 month	80%
Warranty	1 year	
Case Material	ABS	